



# PL-C Cluster 4-Pin Base

## PL-C 26W/827/4P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

### Product data


General Information		LLMF 8000 h Rated		81 %	
Cap-Base	G24Q-3 [ G24q-3]				
Life to 50% Failures Preheat (Nom)	13000 h				
Operating and Electrical					
LSF Preheat 2000 h Rated	99 %	Power (Rated) (Nom)	26.0 W		
LSF Preheat 4000 h Rated	98 %	Lamp Current (Nom)	0.335 A		
LSF Preheat 6000 h Rated	97 %				
LSF Preheat 8000 h Rated	90 %	Temperature			
		Design Temperature (Nom)	28 °C		
Light Technical					
Color Code	827 [ CCT of 2700K]	Controls and Dimming			
Luminous Flux (Nom)	1800 lm	Dimmable	Yes		
Luminous Flux (Rated) (Nom)	1800 lm	Mechanical and Housing			
Color Designation	Incandescent White	Cap-Base Information	4P		
Correlated Color Temperature (Nom)	2700 K	Approval and Application			
Luminous Efficacy (rated) (Nom)	67 lm/W	Mercury (Hg) Content (Nom)	1.4 mg		
Color Rendering Index (Nom)	82	Energy Consumption kWh/1000 h	29 kWh		
LLMF 2000 h Rated	92 %				
LLMF 4000 h Rated	87 %				
LLMF 6000 h Rated	83 %				

# PL-C Cluster 4-Pin Base

Product Data	
Order product name	PL-C 26W/827/4P/ALTO 10PK
EAN/UPC - Product	046677110741
Order code	383349
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

Material Nr. (12NC)	927907382730
Net Weight (Piece)	60.400 g
ILCOS Code	FSQ-26/27/1B-E-G24q=3



## Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 26W/827/4P/ALTO 10PK	27.1 mm	27.1 mm	130.5 mm	149.0 mm	163.9 mm

PL-C 26W/827/4P



## Photometric data

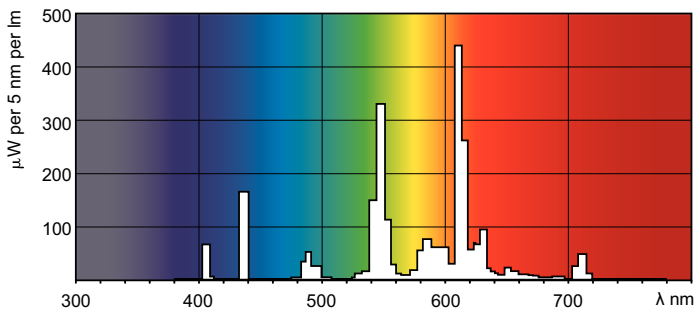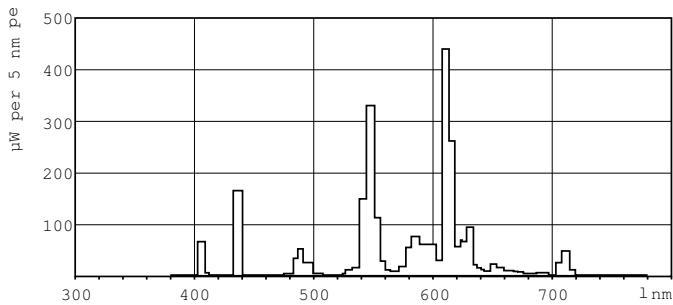

Lightcolor /827

Lightcolor /827

## Lifetime

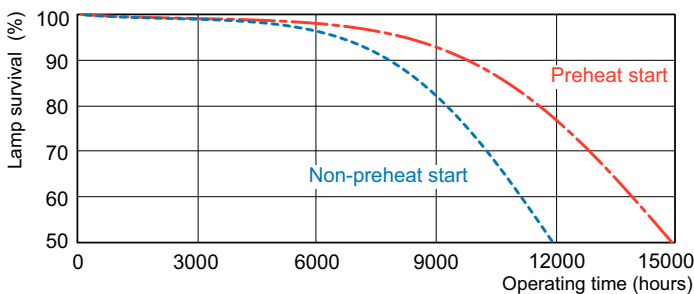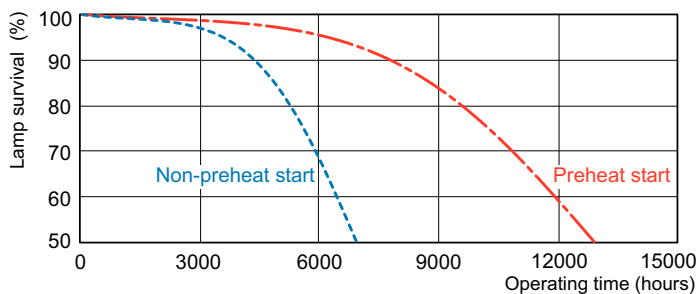

Life Expectancy 3 h cycle

Life Expectancy 12 h cycle

## PL-C Cluster 4-Pin Base

### Lifetime



Lumen Maintenance 3 h and 12 h cycle

