



TUV T5

TUV64T5/HO 4P

TUV T5 lamps are single- or double-ended UVC (germicidal) lamps used in professional water and air disinfection units. The small 16 mm diameter of the lamp allows for a small system design and design flexibility. TUV T5 lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.

Product data

General Information	
Cap-Base	4PINSSINGLEENDED [4 Pins Single Ended]
Main Application	Disinfection
Useful Life (Nom)	9000 h
System Description	HO [High Output (HO)]

Light Technical	
Color Code	TUV
Color Designation	- [Not Specified]
Depreciation at Useful Lifetime	15 %

Operating and Electrical	
Power (Rated) (Nom)	140 W
Lamp Current (Nom)	0.8 A

Voltage (Nom)	175 V
---------------	-------

Mechanical and Housing	
Cap-Base Information	4 Pins Single Ended
Bulb Shape	T5 [T5]

Approval and Application	
Mercury (Hg) Content (Nom)	5.5 mg

UV	
UV-C Radiation at 100 hr	45 W


Product Data	
Order product name	TUV 64T5 HO 4P SE UNP/32

TUV T5

EAN/UPC - Product	8711500261311
Order code	392001
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	32

Material Nr. (12NC)	927971104099
Net Weight (Piece)	156.000 g



Dimensional drawing

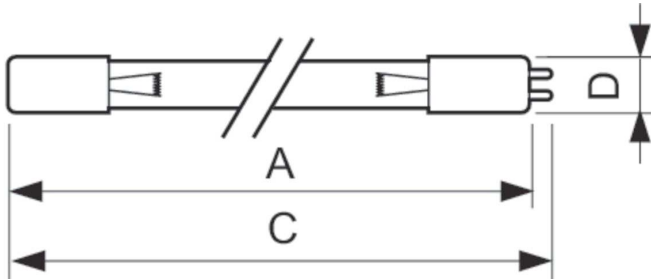

Product	D (max)	C (max)	A (max)
TUV 64T5 HO 4P SE UNP/32	19.3 mm	1564.5 mm	1555.2 mm

TUV 64T5 HO 4P SE

Photometric data

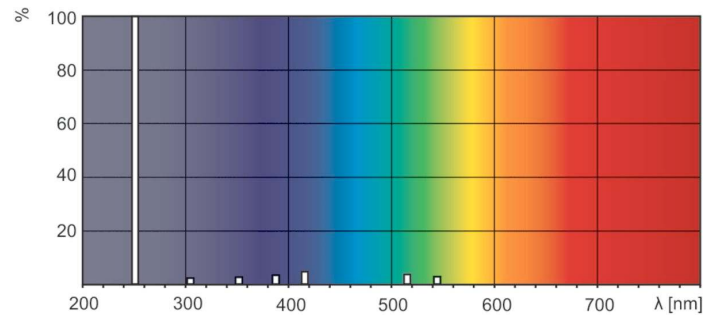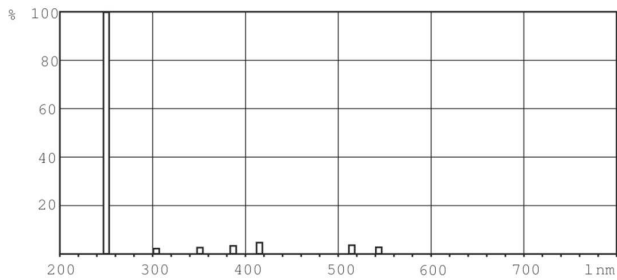

TUV

TUV

