



# MasterColor CDM ED17 Protected

## MHC50/U/MP/3K ELITE

Direct retrofit with immediate energy savings! Range of protected, high-efficiency long life ceramic metal halide lamps with a stable color over lifetime and a crisp, sparkling light to be used in open fixtures.

### Warnings and Safety

• R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA: 21 CFR 1040.30 Canada: SOR/DORS/80-381)

### Product data

General information		Lumen Maintenance - 10% Life	
Cap-Base	E26 [ Single Contact Medium Screw]	Design Mean Lumens	95 %
Operating Position	Universal [ Universal]	Chromaticity Coordinate X (Max)	4300 lm
Main Application	General Lighting (G)	Chromaticity Coordinate X (Min)	0.444
Life to 50% Failures (Nom)	16000 h	Chromaticity Coordinate X (Nom)	0.426
ANSI Code HID	C110/O	Chromaticity Coordinate X (Max)	0.435
Features	ELITE	Chromaticity Coordinate Y (Max)	0.399
Footnotes HID 1	Exclusive to Philips Lighting Company.	Chromaticity Coordinate Y (Min)	0.387
		Chromaticity Coordinate Y (Nom)	0.393
		Correlated Color Temperature (Nom)	3000 K
		Luminous Efficacy (Rated) (Min)	88 lm/W
		Luminous Efficacy (rated) (Nom)	96 lm/W
		Color Rendering Index (Min)	87
		Color Rendering Index (Nom)	90
Light technical			
Color Code	930 [ CCT of 3000K]		
Luminous Flux (Rated) (Min)	4400 lm		
Luminous Flux (Rated) (Nom)	4800 lm		
Color Designation	Warm White (WW)		
Lumen Maintenance - 40% Life	90 %		

# MasterColor CDM ED17 Protected

## Operating and electrical

Power (Rated) (Nom)	50.2 W
Lamp Current (Nom)	0.59 A
Ignition Supply Voltage (Min)	235 V
Re-Ignition Time (Min) (Max)	8 min
Ignition Time (Max)	10 s
Voltage (Max)	110 V
Voltage (Min)	87 V
Voltage (Nom)	95 V

## Mechanical and housing

Bulb Finish	Clear
Cap-Base Information	Brass [ Brass Base]
Bulb Material	Hard Glass
Bulb Shape	ED17P [ ED17P]

## Approval and application

Picogram Per Lumen Hour	103.9 pg/lm.h
Mercury (Hg) Content (Max)	6.6 mg

## UV

Pet (Niosh) (Nom)	982 h/500lx
Damage Factor D/fc (Nom)	0.13


## Luminaire design requirements

Bulb Temperature (Max)	400 °C
Cap-Base Temperature (Max)	190 °C

## Product data

Order product name	MHC50/U/MP/3K ELITE
EAN/UPC - Product	046677423681
Order code	423681
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928601173701
Net Weight (Piece)	0.001 kg


## Dimensional drawing



Product	D	C (max)
MHC50/U/MP/3K ELITE	2.125 in	5.438 in

## MHC50/U/MP/3K ELITE

## Lifetime

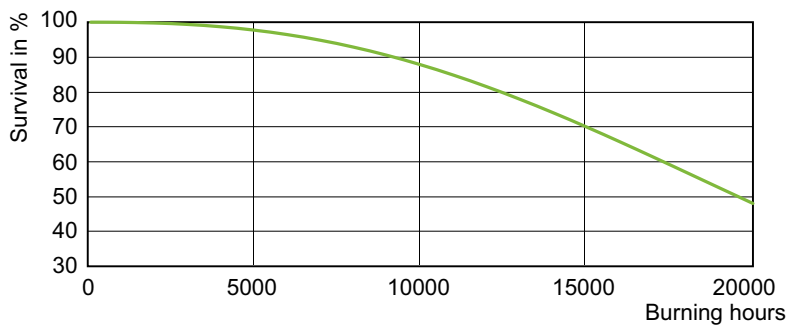

## MHC P 50W /930 ED17P

