



PL-C Cluster 2-Pin Base

PL-C 18W/835/2P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Product data

| General Information | | | |
|------------------------------------|---------------------|--|--|
| Cap-Base | G24D-2 [G24d-2] | | |
| Life To 10% Failures (Nom) | 6500 h | | |
| Life to 50% Failures (Nom) | 10000 h | | |
| LSF 2000 h Rated | 99 % | | |
| LSF 4000 h Rated | 98 % | | |
| LSF 6000 h Rated | 92 % | | |
| LSF 8000 h Rated | 78 % | | |
| | | | |
| Light Technical | | | |
| Color Code | 835 [CCT of 3500K] | | |
| Luminous Flux (Nom) | 1200 lm | | |
| Luminous Flux (Rated) (Nom) | 1200 lm | | |
| Color Designation | White (WH) | | |
| Correlated Color Temperature (Nom) | 3500 K | | |
| Luminous Efficacy (rated) (Nom) | 67 lm/W | | |
| Color Rendering Index (Nom) | 82 | | |
| LLMF 2000 h Rated | 92 % | | |
| LLMF 4000 h Rated | 87 % | | |

| LLMF 6000 h Rated | 83 % |
|-------------------------------|---------|
| LLMF 8000 h Rated | 81 % |
| | |
| Operating and Electrical | |
| Power (Rated) (Nom) | 18 W |
| Lamp Current (Nom) | 0.230 A |
| | |
| Temperature | |
| Design Temperature (Nom) | 28 °C |
| | |
| Controls and Dimming | |
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Cap-Base Information | 2P |
| | |
| Approval and Application | |
| Energy Efficiency Label (EEL) | В |
| Mercury (Hg) Content (Nom) | 1.4 mg |


Datasheet, 2020, November 18 data subject to change

PL-C Cluster 2-Pin Base

| Energy Consumption kWh/1000 h | 22 kWh | | | | |
|-------------------------------|---------------------------|--|--|--|--|
| Product Data | | | | | |
| Order product name | PL-C 18W/835/2P/ALTO 10PK | | | | |
| EAN/UPC - Product | 046677111632 | | | | |
| Order code | 383182 | | | | |
| Numerator - Quantity Per Pack | 1 | | | | |

| Numerator - Packs per outer box | 10 | | |
|---------------------------------|-----------------------|--|--|
| Material Nr. (12NC) | 927905783530 | | |
| Net Weight (Piece) | 57.800 g | | |
| ILCOS Code | FSQ-18/35/1B-I-G24d=2 | | |


Dimensional drawing




PL-C ALTO 18W/835/2P

| Product | D (max) | D1 (max) | A (max) | B (max) | C (max) |
|----------------------|---------|----------|----------|----------|----------|
| PL-C 18W/835/2P/ALTO | 27.1 mm | 27.1 mm | 109.5 mm | 128.0 mm | 150.4 mm |
| 10PK | | | | | |

Photometric data

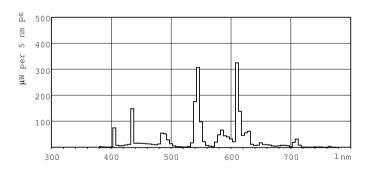


Lightcolor /835

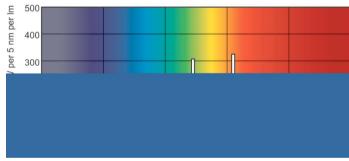

Lightcolor /835

PL-C Cluster 2-Pin Base


Lifetime

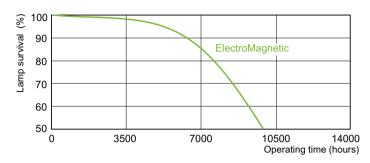



Life Expectancy 3 h cycle

Life Expectancy 12 h cycle

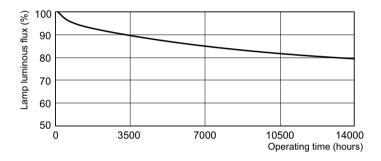

Lumen Maintenance 3h + 12 h cycle



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.